

Simple/Reliable/Green/Efficient



大牧人
Big Herdsman

POULTRY DRINKING LINES

Nipple-style watering system with a simple, reliable structure and excellent water supply and sealing performance.



WEBSITE


 bigherdsman@bigherdsman.com

     **BIGHERDSMAN** 


POULTRY PRODUCTION

Technical Description

- Two-stage filtration at the front end removes impurities from the water.
- A separate back-flush pipeline can precisely record birds' water consumption.
- Special pressure regulator adjusts water pressure and flow rate to meet drinking requirements at different ages; equipped with a manual/auto back-flush knob for line cleaning.
- Double-seal nipple allows 360° side triggering and top triggering, ensuring birds can drink from any angle.
- The water pipe uses expandable male-female joints to compensate for thermal expansion and avoid damage.
- Transparent hose and centralized drain line at the end for easy observation and flushing.

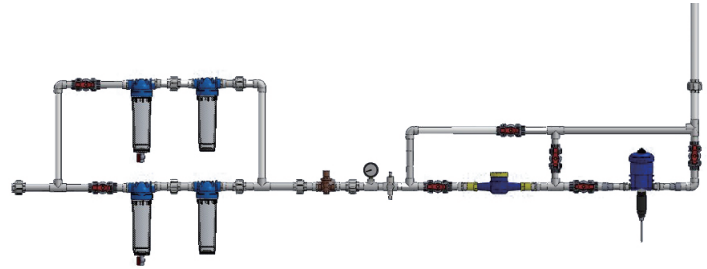


- Red or yellow nipples are available for breeders or broilers, with adjustable water flow depending on pressure and day age.



Technical Parameters

S/N	Category	Feeding capacity
1	Broiler	8- 12birds/Unit
2	Duck	10birds/Unit
3	Breeder	10birds/Unit

DRINKING NIPPLE FEEDING CAPACITY

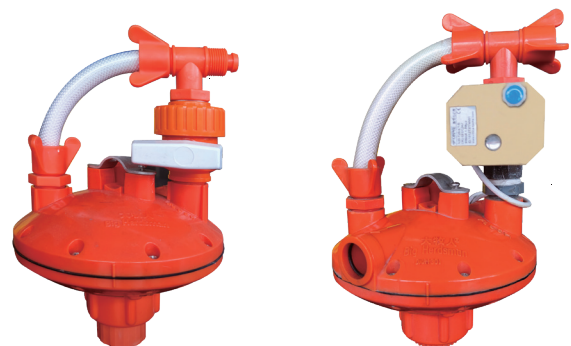

QINGDAO BIG HERDSMAN MACHINERY CO.,LTD

Add: Yuehe road, Konggang industrial park, Qingdao city,
Shandong Province, PR China

Tel: +86-532-8493 3988

Website: www.bigherdsman.com



SCAN QR CODE ON WECHAT

Simple/Reliable/Green/Efficient

大牧人
Big Herdsman

POULTRY ROUND-PIPE DRINKING LINE

Provides stable water flow and efficient filtration, offering a long service life.



WEBSITE


✉ bigherdsman@bigherdsman.com



POULTRY PRODUCTION

Technical Description

- Two-stage filtration at the front end effectively removes impurities.
- Made of highly durable materials that resist deformation and withstand pressure.
- Integrated ball-valve drinkers with stable flow rates, no drips or leaks.
- A well-designed one-piece structure prevents pipe rotation issues.

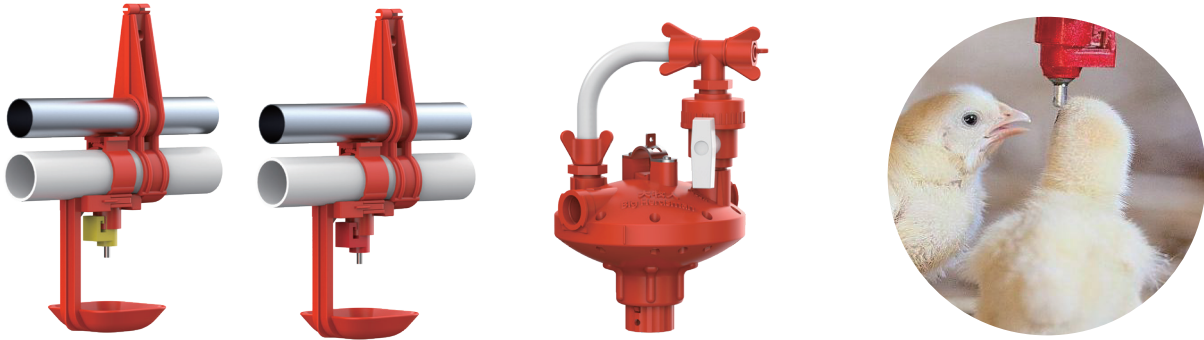

Parameter

Product name	Round tube waterline for chickens
Structural form	Integral ball valve drinking water, 360° side impact can water
Ball valve drinking water equipment quality	ABS polypropylene and 304Stainless steel
Applicable water pressure	2kpa~6kpa 2kpa~6kpa
Outer diameter of the main water inlet pipe	Equal to or greater than 32mm
External dimensions of drinking pipe	Φ33.4 Φ33.4

QINGDAO BIG HERDSMAN MACHINERY CO.,LTD

Add: Yuehe road, Konggang industrial park, Qingdao city,
Shandong Province, PR China

Tel: +86-532-8493 3988

Website: www.bigherdsman.com



SCAN QR CODE ON WECHAT